

Diaphragm Pumps

Engineered for Excellence



FB2 Series – 7.0 GPM Diaphragm Pump

Pump Type: Bypass, Demand

Flow: Up to 7 GPM

Pressure: Up to 100 PSI

Valves: Viton

Diaphragm: Santoprene

Ports: 1/2" FNPT, 3/4" Quick Attach

Power: 12V – Wire Leads with 2-pin molded connector

Weight: 8 lbs

Packaging: Bulk Box, Retail Box

Shipping: 6 per carton, single

- 100% Factory tested
- NSF Approved
- High Torque Motor for superior flow at pressure
- Self-Priming
- Can be run dry



DIAPHRAGM PUMPS

Performance Specifications


FB2 7.0 GPM Bypass

| PSI | GPM | AMPS |
|-----|-----|------|
| 0 | 7.2 | 12.3 |
| 10 | 6.7 | 13.9 |
| 20 | 6.3 | 16.4 |
| 40 | 5.1 | 19.1 |
| 60 | 4.5 | 22.5 |
| 80 | 3.6 | 25.3 |
| 90 | 2.8 | 27.1 |




FB2 7.0 GPM Demand

| PSI | GPM | AMPS |
|-----|-----|------|
| 0 | 7.2 | 12.3 |
| 10 | 6.7 | 13.9 |
| 20 | 6.3 | 16.4 |
| 40 | 5.5 | 19.1 |
| 60 | 4.8 | 22.5 |
| 80 | 4.5 | 25.3 |
| 90 | 4.1 | 27.1 |

Bypass

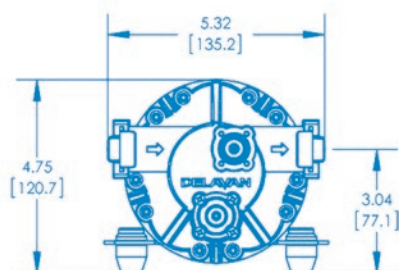

Demand

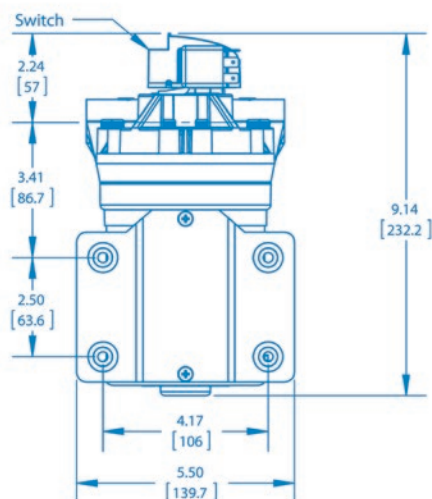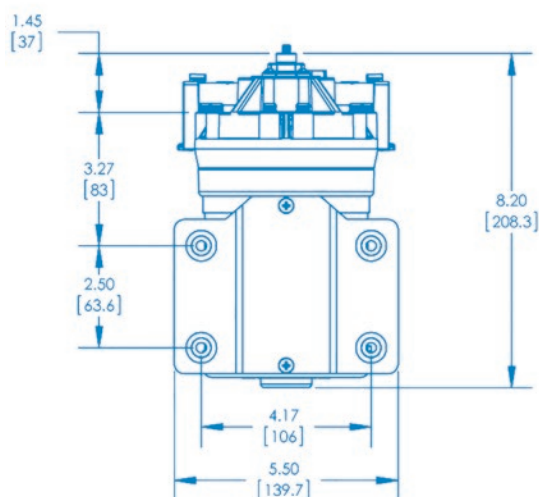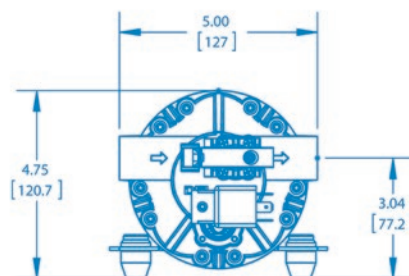

Engineered for Excellence

"We are committed to succeeding in today's increasingly challenging marketplace by responding to each varied and dynamic individual customer requirement with an exclusive and custom tailored solution."